



•• DEFENSE SYSTEMS ••

U.S. ORDNANCE

••• MANUFACTURING •••

BUILT TOUGH AND BATTLE TESTED

Our weapon systems reliability, durability and effectiveness in the field comes from our dedication in using high quality materials and rigorous objective testing during production.





■ INTRODUCTION

2 Company

■ CREW SERVED WEAPONS

4 MK19 MOD 3

6 M2A2 QCB

8 M2A2 QCB Conversion Kit

10 M2HB

12 M48 Turret Type / M2 Fixed

■ MEDIUM MACHINE GUNS

14 M240 GPMG

16 M240 C

17 M240 D

■ LIGHT MACHINE GUNS

18 M60E6

20 M60E6/E4 Conversion Kit

22 M60D Enhanced

24 M249 Standard Model

COMPANY



For more than 25 years, U.S. Ordnance has specialized in military machine guns, all of which we design, develop, manufacture and test with precision and superb craftsmanship to ensure they're of the utmost quality and reliable.


SOLUTIONS DELIVERED

Since 1997, our dedication to manufacturing small arms built for durability and reliability has not changed. Today, our Nevada-based corporation is a globally trusted manufacturer of weapon systems and replacement parts to more than 60 countries for use by their militaries, law enforcement, and special forces. Additionally, we are the sole manufacturer and supplier of the MK19 MOD 3, M2A1 and M60E6 to the United States Department of Defense.

We also sell our dependable NATO standard weapon systems to U.S. governmental agencies (law enforcement and the military) and U.S. Department of State approved foreign military, security and special forces.

MISSION READY

Your mission success is important to us. Our products have been battle tested and proven around the world in a multitude of land, sea and air applications, earning a stellar reputation. We offer military machine guns in calibers ranging from 40mm to 12.7mm, 7.62mm and 5.56mm. Our machines guns consist of the MK19 MOD 3, M2A1 QCB, M2A2 QCB, M2FLEX, M2FIXED, M240 GPMG, M240C, M240D, M60E6, M60D Enhanced, M249 and M249 PARA. Only NATO standard weapon systems are manufactured at our facility.

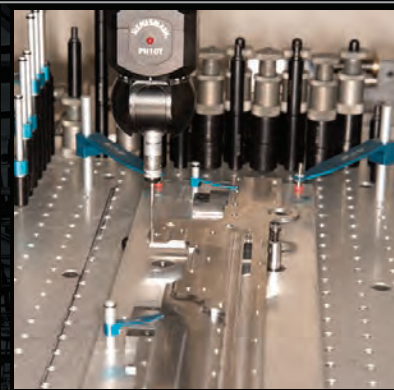

BUILT AND TESTED

We're located on 10 acres in McCarran, Nevada, a rural area 20 minutes outside of Reno in the northern part of the Battle Born State.

The entire manufacturing process for each of our weapons — from machining raw material to assembly to testing — is done on site. Our main facility, an expansive 100,000-square-foot building, is state of the art, clean and well organized. It's equipped with robotic-controlled CNC mills and lathes, screw machines, mil-spec plating facilities and custom robotic rifling and chambering machines. This plant is ISO 9001:2015 certified.

Also on our premises is a 14,000-square-foot annex building in which we store raw materials and another explosion-resistant facility where we keep ammunition.

We also have multiple live firing ranges where we carry out all of our weapons testing. That includes function and proof firing and testing for endurance, U.S. military specification performance and quality assurance.

MK19 MOD 3

WEAPON ///

U.S. Ordnance's MK19 MOD 3 is a belt fed Automatic Grenade Launcher (AGL) capable of firing a variety of 40mm grenades. This weapon is an essential machine gun for fighting forces who aim to dominate space at short and long distances while providing continuous firepower.

This battlefield game-changer has a rate of fire of 325 to 375 rounds per minute and reaches out to distances as great as 2212 meters with an onslaught of lethal fire against a variety of targets including lightly armored vehicles and dismounted infantry out in the open, in defilade, or in entrenched fighting positions.

Due to its low recoil and comparatively light weight, this weapon is adapted for use on many different platforms, including small attack boats and fast attack vehicles, such as the Humvee (HMMWV), AAV and Stryker, military jeeps and a large variety of naval mounts. This weapon is also designed to not cook off because it fires from an open bolt and has a low barrel temperature during rapid fire.

The MK19 MOD 3 is highly portable within small and large units. The weapon's high-lethality and broad versatility makes it a prime choice as a vital weapon in both offensive and defensive operations.



KEY FEATURES ///

- + Sustained Automatic Fire.
- + Dual spade grips for stable control.
- + Removable barrel.
- + No headspace or timing adjustments required.
- + Open-bolt firing and low barrel temps during rapid fire engagements eliminates the possibility of a cook off and enhances cooling between shot bursts.
- + Simple design for easy general maintenance.

- + Weapon life of 50,000 rounds.
- + Vehicle or ground mounted.
- + Chrome bore barrel.
- + Belt pull – 28 round without reduction to rate of fire.
- + HEDP grenades penetrate 75mm rolled homogenous armor at a maximum range of 2,212 meters.
- + Flip up rear sights.
- + Blow back operated.

AVAILABLE OPTIONS ///

- + Mounting rail for optics and accessories.
- + Various mounting and tripod configurations.



SPECIFICATIONS

Photo shown with optional tripod.
All measurements are for weapon only.



Caliber	40x53mm High Velocity
Firing Mode	Full-Automatic
Ammo Feeding	Left-hand
Max Effective Range	Area Target - 2,000 Meters (2,187 yds) Point Target - 1,500 Meters (1,640 yds)
Max Range	2,212 Meters (2,419 yds)

Ammunition	All High Velocity 40mm (Nato Qualified)
Muzzle Velocity	241 m/s (790 fps)
Rate of Fire (cyclic)	325-375 Rounds per minute
Weight (complete gun)	35 kg (77.6 lbs)
Length	1,095mm (43.1 in)
Width	340 mm (13.4 in)

M2A2 QCB


WEAPON ///

The U.S. Ordnance M2A2 machine gun is an air-cooled, belt-fed machine gun that fires from a closed bolt and operates on the short recoil principle with fixed headspace and timing. It is capable of both sustained automatic and accurate single-shot fire. It can be mounted on a vehicle, boat, helicopter or other aircraft. Ammunition may be fed from either the left or right side for use by both infantry and in armored vehicles.

U.S. Ordnance's M2A2 weapon system has been tested to well over 50,000 rounds. Its single-breech lock system allows for field rebuild, eliminating the need for depot-level maintenance during its lifetime and thereby greatly reducing logistical support.

U.S. Ordnance developed its M2A2 12.7mm weapon after years of experience manufacturing machine guns for the U.S. Department of Defense and U.S. Foreign Allies.

The U.S. Ordnance M2A2 offers the proven performance of the existing M2HB machine gun but also features fixed headspace and timing. This upgrade improves the performance of the battle-proven M2HB weapon system, largely increases the level of safety for operating personnel and affords barrel changing in 10 seconds or less. Our M2A2 system allows one person to change a barrel, which reduces exposure time to enemy fire and quickly readies the weapon for continued operation.

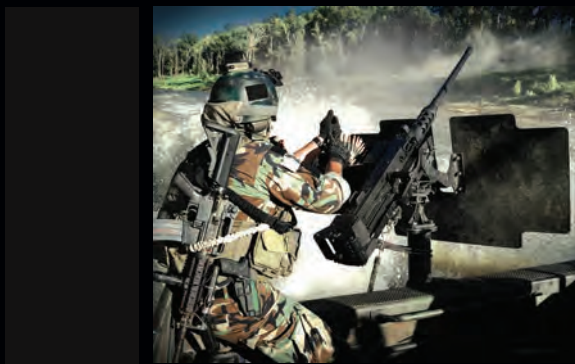

KEY FEATURES ///

- + Fixed headspace and timing eliminates safety concerns associated with barrel changing and improper timing and eliminates need to adjust headspace at the operator level.
- + Improved barrel handle simplifies hot-barrel changes.
- + Quick Change Barrel alignment and retention system ensures barrel is securely locked and aligned.
- + Can be fitted to all types of armored, light and heavy vehicles, patrol boats, helicopters and other aircraft to meet combat needs.

- + Variety of NATO mounting applications available.
- + Can be fired manually or by solenoid.
- + Fires all types of NATO ammunition: Ball, Tracer, AP, API, APIT, AP Hardcore and Multipurpose.
- + Sustained automatic or single-shot firing.
- + Fires from the closed bolt for single-shot accuracy.
- + Converts from left-hand to right-hand feed.
- + Simple, durable, and rugged design for ease of maintenance.

AVAILABLE OPTIONS ///

- + Available in M48 Turret Type (1005-00-957-3893), Fixed Type Right Hand Feed (1005-00-122-9339), Fixed Type Left Hand Feed (1005-00-122-9368) and Soft Mount (1005-01-343-0747).
- + Optional positive safety selector for the trigger mechanism to prevent accidental discharges when traveling over rough terrain while manning the weapon system.
- + Optional quick detach flash reducer.



SPECIFICATIONS

Photo shown with optional M3 tripod with Pintel and Traversing Elevation Mechanism.

All measurements are for weapon only.

Caliber	12.7x99 mm NATO (.50 Cal.)	Rate of Fire (cyclic)	450-635 Rounds per minute
Max Effective Range	1,829 Meters (2,000 yds)	Twist, Right-Hand	One turn is 38.10 cm (15 in.)
Max Range	6,767 Meters (7,400 yds)	Feed	Link-Belt
Muzzle Velocity	929.64 mps (3,050 fps)	Operation	Short Recoil
Weight of Gun	38.10 kg (84 lbs)	Firing Mode	Single Shot, Full Automatic
Weight Barrel	11.79 kg (26 lbs)	Feeding	Disintegrating Link Belt
Length of Gun	165.43 mm (65.13 in)		(M2 or M9 Link)
Length of Barrel	114.30 mm (45 in)	Cooling	Air
Number of Lands and Groves	8	Operational Temp.	-54C (-62.5F) / +63C (145.5F)

M2A2 QCB CONVERSION KIT

WEAPON ///

The U.S. Ordnance M2A2 Quick Change Barrel Conversion Kit provides a safe and inexpensive conversion for any serviceable standard model M2HB 12.7mm weapon. Any M2HB weapon when converted to the M2A2 QCB configuration results in a weapon that has fixed headspace and timing. This provides a new level of operator safety by allowing

changing of the barrels in 10 seconds or less minimizing the operator's exposure to danger. The U.S. Ordnance M2A2 is the only system that utilizes ONE STANDARD breech lock.

Our kit includes a removable insulated barrel carrying handle for every barrel. Our barrels are Chromium Cobalt Lined and hard-chromed per the latest technical data package.



KEY FEATURES ///

- + Fixed headspace and timing eliminates safety concerns associated with barrel changing and improper timing.
- + Greatly increases the level of safety for operating personnel.
- + Allows changing of the barrel in 10 seconds or less.
- + M2HB machine guns can be converted to U.S. Ordnance M2A2 using our QCB conversion kit by an armorer at the customer location in less than 30 minutes per weapon - without complex tools and machines.
- + U.S. Ordnance barrel alignment and retention system assures that the barrel is securely locked and aligned.
- + Improved barrel handle simplifies hot-barrel changing.
- + Non QCB parts are interchangeable with M2HB machine guns and spare parts eliminates logistics concerns during fielding.

9



M2HB

WEAPON ///

The U.S. Ordnance M2HB is an air-cooled, belt-fed, machine gun that fires from a closed bolt and operates on the short recoil principle. The M2HB is capable of both sustained automatic and accurate single shot fire. The M2HB machine gun is used extensively as a vehicle, boat, helicopter or other aircraft mounted weapon by the United States and most NATO countries. Ammunition may be fed from either the left or the

right side of the gun, making it suitable for use by both infantry and in armored vehicles. The M2HB is in service with the U.S. Military and the armed forces of over 23 nations and is the world standard in heavy machine guns.

U.S. Ordnance M2HB/FLEX weapon system is available via FMS contract W15QKN-17-D-0041.



KEY FEATURES ///

- + U.S. Government long-term contract ensures ongoing parts interchange with all M2HB machine guns produced in the United States.
- + Can be used as a ground gun on the M3 Tripod Mount.
- + Can be fitted to all types of armored, light and heavy vehicles, patrol boats, helicopters and other aircraft to meet combat needs.
- + Fires all types of NATO ammunition: Ball, Tracer, AP, API, APIT, AP Hardcore and Multipurpose.
- + Sustained automatic or single-shot firing.
- + Simple, durable, and rugged design for ease of maintenance.
- + Fires from the closed bolt for single-shot accuracy.
- + Replaceable heavy barrel assembly.
- + Adjustable headspace and timing.
- + Converts from left-hand to right-hand feed.
- + Variety of NATO mounting applications available.
- + Can be fired manually or by solenoid.

AVAILABLE OPTIONS ///

- + M2 FLEX (1005-00-322-9715).
- + M2 FIXED / M48 TURRET TYPE (1005-00-957-3893).
- + M2 UP GUNNED WEAPONS STATION (UGWS) (1005-01-362-6237).



SPECIFICATIONS

Photo shown with optional M3 tripod with Pintel and Traversing Elevation Mechanism.

All measurements are for weapon only.

Caliber	12.7x99 mm NATO (.50 Cal.)
Max Effective Range	1,829 Meters (2,000 yds)
Max Range	6,767 Meters (7,400 yds)
Muzzle Velocity	929.64 mps (3,050 fps)
Weight of Gun	38.10 kg (84 lbs)
Weight Barrel	11.79 kg (26 lbs)
Length of Gun	165.43 mm (65.13 in)
Length of Barrel	114.30 mm (45 in)
Number of Lands and Groves	8

Rate of Fire (cyclic)	450-635 Rounds per minute
Twist, Right-Hand	One turn is 38.10 cm (15 in.)
Feed	Link-Belt
Operation	Short Recoil
Firing Mode	Single Shot, Full Automatic
Feeding	Disintegrating Link Belt (M2 or M9 Link)
Cooling	Air
Operational Temp.	-54C (-62.5F) / +63C (145.5F)

M48/M2 FIXED

WEAPON ///

The U.S. Ordnance M48 Fixed (Turret Type) is a link-belt fed, recoil-operated, air cooled, crew-served machine gun. The machine gun is capable of firing automatic only. Ammunition may be fed from either the left or the right side of the gun, making it suitable for use in armored vehicles. The M48 machine gun is used extensively on the M1, M1A1, or M1A2 Abrams main battle tank commander's station and coaxial

mounted on various Armored Fighting Vehicles (AFV) used by the United States and most NATO countries. The M48 is in service with the U.S. Military and the armed forces of over 23 nations and is the world standard in heavy machine guns.

U.S. Ordnance M48 / M2 FIXED weapon system is available via FMS contract W15QKN-17-D-0041.



QCB CONVERSION ///

- + U.S. Government long-term contract ensures ongoing parts interchange with all M48 machine guns produced in the United States.
- + Charging or recharging the weapon in case of a malfunction or stoppage is accomplished with the M10 Charger.
- + Standard mounting for most NATO types of armored, light and heavy vehicles turrets.
- + Fires all types of NATO ammunition: Ball, Tracer, AP, API, APIT, AP Hardcore and Multipurpose.

- + Sustained automatic firing.
- + Simple, durable, and rugged design for ease of maintenance.
- + Fires from the closed bolt for accuracy.
- + Replaceable heavy barrel assembly.
- + Adjustable headspace and timing.
- + Converts from left-hand to right-hand feed.
- + Variety of NATO mounting applications available.
- + Can be fired manually or by solenoid.

AVAILABLE OPTIONS ///

- + M2 FLEX (1005-00-322-9715).
- + M2 FIXED / M48 TURRET TYPE (1005-00-957-3893).
- + M2 UP GUNNED WEAPONS STATION (UGWS) (1005-01-362-6237).
- + Optional positive safety selector for the trigger mechanism to prevent accidental discharges when they are traveling over rough terrain while manning the weapon system.



SPECIFICATIONS

All measurements are for weapon only.

Caliber	12.7x99 mm NATO (.50 Cal.)	Rate of Fire (cyclic)	450-635 Rounds per minute
Max Effective Range	1,829 Meters (2,000 yds)	Twist, Right-Hand	One turn is 38.10 cm (15 in.)
Max Range	6,767 Meters (7,400 yds)	Feed	Link-Belt
Muzzle Velocity	929.64 mps (3,050 fps)	Operation	Short Recoil
Weight of Gun	38.10 kg (84 lbs)	Firing Mode	Single Shot, Full Automatic
Weight Barrel	11.79 kg (26 lbs)	Feeding	Disintegrating Link Belt (M2 or M9 Link)
Length of Gun	165.43 mm (65.13 in)	Cooling	Air
Length of Barrel	114.30 mm (45 in)	Operational Temp.	-54C (-62.5F) / +63C (145.5F)
Number of Lands and Groves	8		

M240 GPMG

WEAPON ///

The 7.62mm NATO M240B/General Purpose Machine Gun (GPMG) is a very reliable, fully-automatic, gas-operated, disintegrating link, belt fed, air-cooled, crew-served weapon. It fires from an open bolt and features a quick change barrel with fixed headspace. The M240B is the US Infantry version and is equipped with a buttstock,

folding bipod, forestock and multiple M1913 Picatinny rails for mounting optics, laser illuminators, and accessories. The M240B provides accurate and effective sustained rate of fire required to suppress and destroy enemy soft targets.



KEY FEATURES ///

- + Gas-operated – Recoils with gas-assist boost. Three gas settings to maintain a consistent rate of fire.
- + Positive Locking of Bolt Body – Firing pin is part of bolt and operating rod assembly, and cannot strike primer until bolt is fully locked.
- + Fires from Open Bolt Position – Prevents explosion of cartridge (cook-off) after prolonged firing.
- + Can be configured for Left or Right Hand Feed.
- + U.S. Ordnance parts interchange with existing M240 and GPMG equipment in customer inventory.
- * Compatible with all existing M240 GPMG mounts and tripods.

MAJOR IMPROVEMENTS ///


- + The charging handle guide is machined into the right side plate which eliminates receiver breakage that occurs with older riveted design.
- + Surface treatment on bolt locking lugs provide extended receiver service life.

AVAILABLE OPTIONS ///

- + Optional Chromium Cobalt Lined sustained fire barrels for extended barrel life.
- + Barrel head shield.
- + Hydraulic buffer system available by request.
- + Forward M1913 accessory rail by request.



GPMG OPTION ///



NATO Flash Hider



NATO Gas System

SPECIFICATIONS ///

Caliber	7.62x51 mm NATO
Firing Mode	Full-Automatic
Operating Principal	Gas-Operated
Max Effective Range	1,200 Meters (1,312 yds) - Iron Sight
Max Range	3,725 Meters (4075 yds)
Muzzle Velocity	834 m/s (2,740 fps)
Rate of Fire (cyclic)	650-950 Rounds per minute


Weight (Complete Gun)	11.79 kg (26 lbs)
Weight Barrel	3 kg (6.6 lbs)
Length (Complete Gun)	1,263 mm (49.7 in)
Length Barrel	630 mm (24.8 in)
Width (Folded Bipod)	160 mm (6.3 in)
Height (Folded Bipod)	225 mm (8.9 in)
Barrel	Chrome Plated Bore

M240C

WEAPON ///

The M240 model is designed as a coaxial machine gun for tanks and 7.62mm fire power on light armored vehicles. The M240C is a variation with a right-hand feed for use on the M2/M3 Bradley Fighting Vehicle and LAV as the coaxial machine gun.

Both variant uses a charging cable instead of a charging handle and have a full or half pistol grip depending on application.

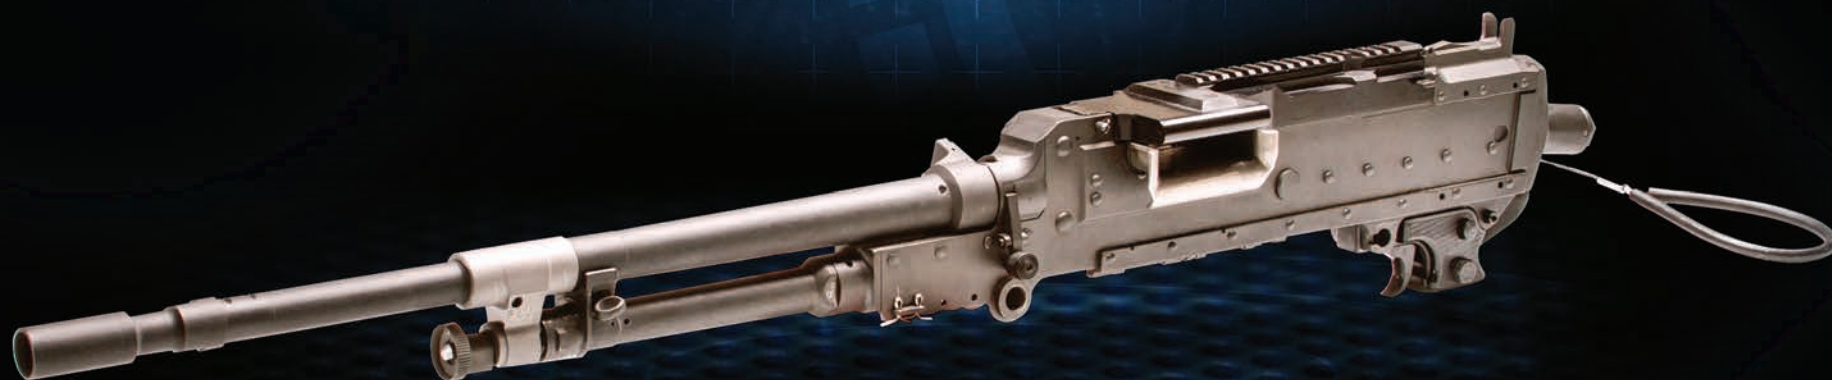

SPECIFICATIONS ///

Available with Full or shortened trigger group.




Caliber	7.62x51 mm NATO
Firing Mode	Full-Automatic
Operating Principle	Gas-Operated
Max Effective Range	1,200 Meters (1,312 yds) - Iron Sight
Max Range	3,725 Meters (4075 yds)
Muzzle Velocity	834 m/s (2,740 fps)
Rate of Fire (cyclic)	650-900 Rounds per minute

Weight (Complete Gun)	10.07 kg (22.2 lbs)
Weight Barrel	3 kg (6.6 lbs)
Length (Complete Gun)	1,263 mm (49.7 in)
Length Barrel	630 mm (24.8 in)
Width	160 mm (6.3 in)
Height	225 mm (8.9 in)
Barrel	Chrome Plated Bore

M240D

WEAPON

The M240D is a mounted version of the M240/GPMG. The M240D can be mounted on boats, vehicles or as a pintle-mounted door or window gun in helicopters. The M240D has a trigger group which accommodates a spade grip and can be configured with optional aircraft ring sight for rapid target acquisition.

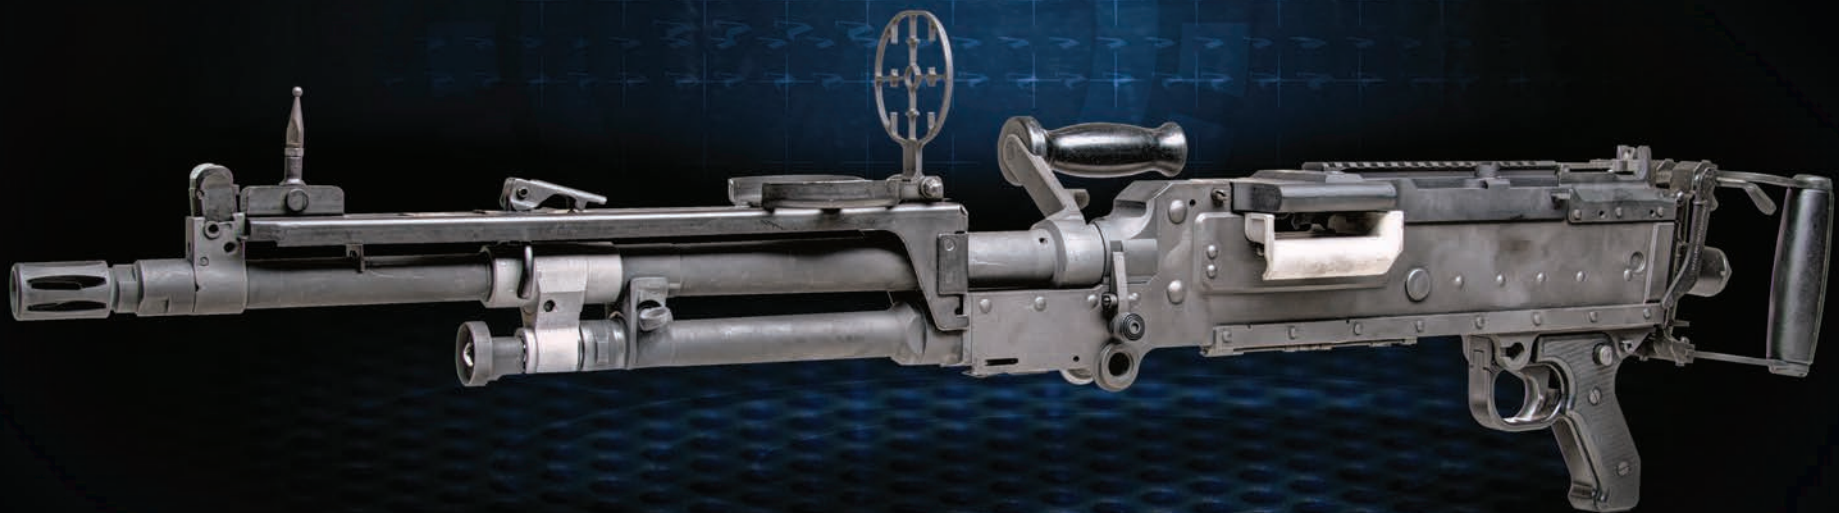

M240D

SPECIFICATIONS

Available options include aircraft ring sights.

Available with Full or shortened trigger group.

Caliber	7.62x51 mm NATO
Firing Mode	Full-Automatic
Operating Principal	Gas-Operated
Max Effective Range	1,200 Meters (1,312 yds) - Iron Sight
Max Range	3,725 Meters (4075 yds)
Muzzle Velocity	834 m/s (2,740 fps)
Rate of Fire (cyclic)	650-900 Rounds per minute

Weight (Complete Gun)	10.39 kg (22.9 lbs)
Weight Barrel	3 kg (6.6 lbs)
Length (Complete Gun)	1,263 mm (49.7 in)
Length Barrel	630 mm (24.8 in)
Width	160 mm (6.3 in)
Height	225 mm (8.9 in)
Barrel	Chrome Plated Bore

M60E6

WEAPON ///

The 7.62mm NATO M60E6 General Purpose Machine Gun (GPMG) represents the latest improvements to the M60 Series of machine guns. It is a gas operated, disintegrating link, belt fed, air-cooled machine gun. It fires from an open bolt and features a quick-change barrel. The M60E6 features a machined aluminum feed cover with integrated M1913 Picatinny rail for mounting optics. An aluminum M1913 rail handguard

provides for the mounting of infrared laser aiming devices and other sensors, giving the weapon 24 hour capability.

U.S. Ordnance M60E6 weapon system and spare are available via FMS contract W15QKN-18-D-0167.



KEY FEATURES ///

- + Battle proven, reliable and user-friendly.
- + 30% improved belt pull provides increased reliability in harsh and dirty environments.
- + Light and compact design provides increased mobility and allows for accurate off hand (shouldered) direct fire support.
- + Multiple M1913 rail mounting points for mounting optics, aiming lasers, and accessories.
- + Chromium Cobalt Lined sustained fire barrels for extended barrel life. Available in short or heavy fluted configuration for application flexibility.
- + Controllable yet lethal rate of fire allows for accurate firing in offhand, kneeling, and prone positions.
- + All major components are directly interchangeable with other M60 configurations.
- + Mounts directly or adapts to all standard NATO tripod and vehicle mounts.

MAJOR IMPROVEMENTS ///

- + Ergonomic pistol grip with improved trigger and storage compartment.
- + Improved ergonomic butt stock with shoulder rest.
- + Forged Aluminum topcover with M1913 picatinny rail for mounting optics eliminates charging jams and improves operator safety by allowing a belt loaded but not charged feature.
- + Larger profile charging handle for improved ergonomics.
- + Fail-safe reversible gas piston with improved gas system prevents system from loosening during use.
- + Redesigned feed tray facilitates fast clearing of ammunition links during reloading.
- + Improved receiver mounted ammunition hanger provides a stable mounting point for ammunition pouch and isolates the feed tray from accidental damage.
- + Adjustable front sight allows zeroing of primary and spare barrels.
- + Offset barrel handle provides a clear sight picture and facilitates hot barrel changes.
- + Lightweight, one-hand operated, bipod for use in the prone firing position.
- + Lightweight forearm with adjustable pistol grip for improved control with (3) M1913 rails for mounting aiming lasers and accessories. Comes configured with plastic molded rail protectors.
- + Hard chrome and induction hardening of oprod tube facilitates easier cleaning and increases the service life of the receiver.



M60E6

SPECIFICATIONS

Heavy Fluted Barrel is an Additional Cost.

Caliber	7.62x51 mm NATO
Max Effective Range	1100 Meters (1200 yds)
Max Range	3725 Meters (4075 yds)
Muzzle Velocity	853 m/s (2800 fps)
Rate of Fire (cyclic)	500-650 Rounds per minute
Weight	
(Short Barrel)	9.17 kg (20.21 lbs)
(Long Barrel)	9.35 kg (20.61 lbs)

(Heavy Fluted Barrel)*	9.60 kg (21.16 lbs)
M60E6 Length	
(Short Barrel)	939.8 mm (37 In)
(Long Barrel)	1066 mm (42 In)
(Heavy Fluted Barrel)*	965 mm (38 In)
Width	120 mm (4.8 in)

M60E6/E4 CONVERSION KIT

WEAPON ///

U.S. Ordnance M60E6 or M60E4 Conversion Kit will upgrade any serviceable M60 receiver to the M60E6 or M60E4 configuration. Upgrades can be performed at U.S. Ordnance or at the customer facility after training by U.S. Ordnance staff. Installation of our kit on your serviceable M60 receiver brings with it a new gun warranty. Serviceable M60 machine guns can be converted and upgraded using our conversion

kit by an armorer at the customer location in less than 30 minutes per weapon—without complex tools and machines.

The U.S. Ordnance M60E6 conversion kits are available via FMS contract W15QKN-18-D-0167.



KEY FEATURES ///

- + Light and compact design provides increased mobility.
- + M1913 rail top cover allows for mounting of optics.
- + Improved feedcam assembly eliminates charging jams and improves operator safety by allowing a belt loaded but not charged feature. The 30% improved belt pull provides increased reliability.
- + Lightweight forearm/pistol grip for improved control with increased heat protection.
- + Integrated M1913 Picatinny rail handguard for the mounting of laser aiming devices and other sensors (Mod 1 only).
- + Fail-safe reversible gas piston with simplified gas system.
- + Chromium Cobalt Lined sustained fire barrels for application flexibility and extended barrel life.
- + Adjustable front sight allows zeroing of primary and spare barrels.
- + Offset barrel handle provides a clear sight picture and eliminates the need for a heat mitten for barrel changes.
- + Lightweight, one-hand operated, receiver mounted bipod eliminates the weight of the bipod on the spare barrel.
- + Improved trigger group prevents incorrect assembly and features an ambidextrous safety and winter/NBC trigger guard.
- + New flat spring latch on trigger assembly prevents accidental detachment of the trigger assembly.
- + Receiver mounted ammunition hanger provides a stable and secure mounting point for ammunition pouch and isolates the feed tray from accidental damage.
- + Lightweight butt stock with hinged shoulder rest and improved buffer attachment mechanism provides for fail-safe attachment of the buttstock to the receiver.
- + 2 sear notches minimize possibility of a runaway gun.
- + All major components are directly interchangeable with other M60 configurations.
- + Adapts to all standard M60 tripod and vehicle mounts.

21



M60D ENHANCED

WEAPON ///

The M60D Enhanced is a mounted version of the standard M60E6. It can be mounted on boats, vehicles or as a pintle-mounted door gun in helicopters. The M60D Enhanced features a redesigned machined aluminum feed cover with integrated M1913 Picatinny rail for the mounting of optics and a forward M1913 Picatinny rail for other sensors, giving the weapon 24 hour capability.

The M60D Enhanced is a gas operated, disintegrating link, belt fed, air-cooled machine gun. It fires from an open bolt and features a quick-change Chromium Cobalt Lined barrel. The M60D Enhanced is fitted with spade grips for flexible use and an aircraft ring sight for rapid target acquisition. A canvas bag can be affixed to the gun to capture

ejected casings and links, preventing them from being sucked into the rotor blades or into an engine intake.

The M60D Enhanced is used on the UH-1B Huey (using the M23, XM29, M59 and the Sagami mounts), the CH-47 Chinook (using the M24 and M41 mounts) in both door and ramp locations, the ACH-47A "Guns-A-Go-Go" variant of the Chinook (using the XM32 and XM33 mounts), and on the UH-60 Black Hawk (using the M144 mount). An "egress kit" or "infantry modification kit" is available to provide downed aircrew personnel with increased fire power but the weapon is configured with a bipod and sling mount for ground use in the existing configuration.



KEY FEATURES ///

- + Reliable and user-friendly.
- + M1913 Picatinny rail top cover for mounting optics and forward M1913 rail for mounting laser aiming devices and other sensors giving the weapon 24 hour capability.
- + Improved feed cam assembly eliminates charging jams and improves operator safety by allowing a belt loaded but not charged feature. The 30% improved belt pull provides increased reliability.
- + Chromium Cobalt Lined sustained fire barrels.
- + All major components are directly interchangeable with other M60D configurations.
- + Fail-safe reversible gas piston with simplified gas system.
- + Offset barrel handle provides a clear sight picture and eliminates the need for a heat mitten for barrel changes.
- + Lightweight one-hand operated receiver mounted bipod eliminates the weight of the bipod on the spare barrel.
- + Hard chrome and induction hardening of oprod tube facilitates easier cleaning and increases the service life of the receiver.
- + Upgrade kits available for older M60D machine guns.



SPECIFICATIONS

Caliber	7.62x51 mm NATO
Max Effective Range	1100 Meters (1200 yds)
Max Range	3725 Meters (4075 yds)
Muzzle Velocity	853 m/s (2800 fps)
Rate of Fire (cyclic)	500-600 Rounds per minute
Weight	11.03 kg (24.32 lbs)
Length	1111 mm (43.75 in)
Width	146 mm (5.75 in)

M249 STANDARD MODEL

WEAPON ///

The M249 light machine gun (LMG), previously designated the M249 Squad Automatic Weapon (SAW) is an American version of the belt-fed 5.56mm Belgian FN Minimi. It has been adopted as combat proven by 45 countries as standard issue for armed forces.

The U.S. Ordnance M249 machine gun provides infantry squads with the heavy volume of fire from a machine gun combined while approaching the accuracy and portability of a rifle.



KEY FEATURES ///

- + Fires 5.56 x 45mm NATO belted cartridges from 200 round box or 100 or 200 round pouches.
- + It can also use M16/M4 STANAG magazines, providing the SAW gunner an emergency source of ammunition.
- + Rear Sight with MIL-STD-1913 Picatinny rail top cover for day and night optics.
- + Foldable bipod with adjustable height (3 positions).
- + Folding Carry Handle.
- + Hydraulic buffer system reduces recoil forces.
- + Feed tray with belt retaining pawls for easy loading with one hand.

Standard Model

- + Ergonomic fixed length buttstock, hydraulic buffer, and folding shoulder rest.
- + Full length quick change barrel with carry handle and front sight adjustable in elevation and azimuth.

Para Model

- + Ergonomic buttstock adjustable in length (5 positions), hydraulic buffer, and folding shoulder rest.
- + Short quick change barrel with carry handle and front sight adjustable in elevation and azimuth.

*Para Model option not showcased in picture.



SPECIFICATIONS ///

Factory tested for function & accuracy per MIL-DTL-70446C.

Fires 5.56x45 mm NATO cartridges on belts which can be in 200 round boxes or 100 & 200 round pouches.

Caliber
Firing Mode
Operating Principal
Max Effective Range

5.56x45 mm NATO
Full-Automatic
Gas-Operated
800-1000 Meters
(875-1,094 yds)
700-1000 Rounds per minute
916 m/s (3,000 ft/s)
1 Turn in 7 inches

Rate of Fire (cyclic)
Muzzle Velocity
Rifling Twist (RH)

Weight (With Bipod and tools) 7.701 kg (16.98 lbs)
Length (Complete Gun) 1,015 mm (39.96 in)
Length Barrel 520 mm (20.50 in)
Stock Fixed



BUILT TOUGH
AND
BATTLE TESTED

U.S. ORDNANCE

300 Sydney Drive
McCarren, NV 89437
USA

USORD.COM



T: 775.343.1320

F: 775.343.1331

E: sales@usord.com